

Loose Ferrule Stripper / Crimper



MAIN FEATURES

The electro-pneumatic wire stripping and loose ferrule crimping machine is a simple maintenance-free, and wear free machine making it the most reliable. It is equipped with standard loose ferrules with plastic insulations and tooling for wires and ferrules up to 14 AWG on the FC-200 and 12 & 10 AWG on the FC-250.

The FC-200 can be simply set by selecting the cross section, and changing the crimping tools from the tooling kit included.

Stripping and crimping is simple! And can be done in one operation!

TECHNICAL SPECIFICATIONS

WIRE RANGE

FC-200: Standard: 22 - 14 AWG (0.5 - 1.5 mm²)
With Options: 24 - 12 AWG (0.25 - 2.5 mm²)
FC-250: 12 - 8 AWG (4, 6, 10 mm²)

FC-200 OPTIONS AVAILABLE

Extension Kit for .25-.341 mm² 24 AWG
Extension Kit for 2.5 mm² 12 AWG

Crimping Die for square crimping
Replacement Conveyor Bowl Expansion
Kit for thicker insulation (UL)

VOLTAGE

110V or 220V 1 Phase
60/50 Hz

AIR SUPPLY


6 bar

CRIMP LENGTH

FC-200: 6 - 12 mm
FC-250: 12 mm only

DIMENSIONS

Length: 21.7 in. (55 cm)
Width: 9.8 in. (25 cm)
Height: 16.2 in. (41.2 cm)
Weight: 60 lbs (27 Kg)

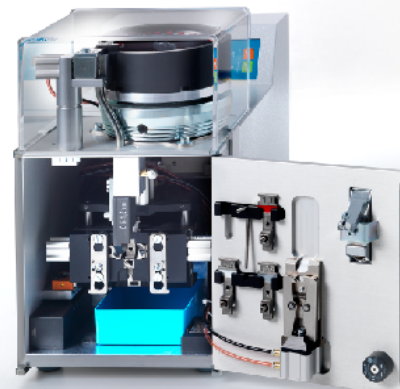

FC-200 Price \$15,450

FC-250 Price \$13,450