


232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataguidecable.com

**CANBUS: 2 CONDUCTOR 18 AWG PP-TPR UNSHIELDED
WITH FILLER**

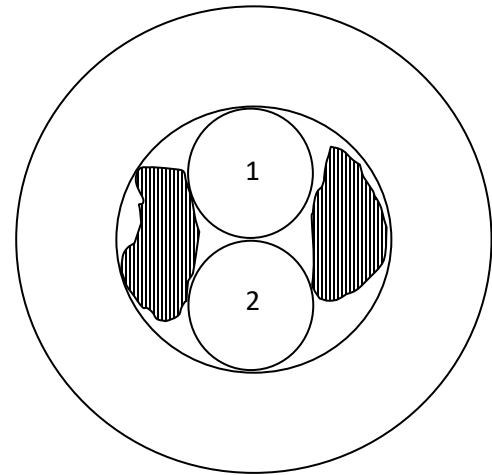

CONDUCTORS:

- 18 AWG (19x.0092") Bare Annealed Copper Insulated with .020" Nominal Wall of 105C Polypropylene to a Nominal O.D. of .085"
- 2 Conductor Total

COLOR CODE:

- As Indicated

NOTES:

- Overall 2" Maximum Left Hand Direction Twist Lay
- Fibralated Polypropylene Filler
- Overall .001" Thickness Polyester Tape, 25% Overlap
- Overall .048" Wall Black 125C TPR Jacket to .268" Nominal Final Diameter +/- .010"
- Surface Printed in White Ink: "DGC P/N 17M8-2 18/2 CANBUS 120 OHM -60C TO 105C SUN RES J1939/15 STYLE"

DESIGN:

- Reference SAE J1939-15
- Operating Temperature Range: -40C to +105C
- Impedance: 120 OHMS +/- 10%
- Maximum Capacitance (Cond.-Cond.): 22.75 pf/ft
- Sunlight Resistant

COLOR CODE

CONDUCTOR	COLOR
1	YELLOW
2	GREEN

LISTINGS/AGENCY APPROVAL

- RoHS Compliant

REVISION HISTORY

0	12/20/17	WJD	FIRST ISSUE
1	4/25/18	WJD	ADD "SUN RES" TO LEGEND

Customer Number	
D.G. Part Number	17M8-2
Prepared By:	LLJ
Reviewed By:	WJD