


232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataguidecable.com

CANBUS: 2 CONDUCTOR 18 AWG XLPE-TPR UNSHIELDED WITH FILLER

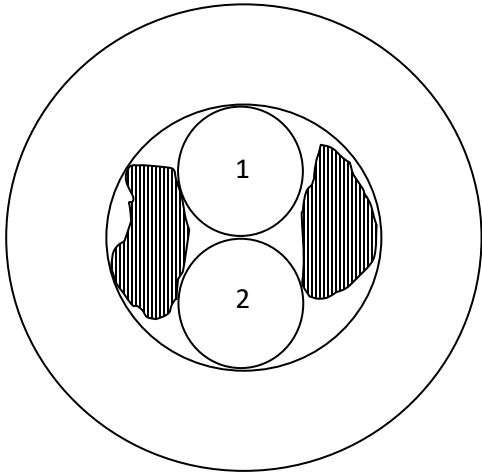

CONDUCTORS:
 - 18 AWG (19x.0092") Bare Annealed Copper Insulated with .020" Nominal Wall of 125C XLPE to a Nominal O.D. of .085"
 - 2 Conductor Total

COLOR CODE:
 - As Indicated

NOTES:
 - Overall 2" Maximum Left Hand Direction Twist Lay
 - Fibrilated Polypropylene Filler
 - Overall .001" Thickness Polyester Tape, 25% Overlap
 - Overall .048" Wall Black 125C TPR Jacket to .268" Nominal Final Diameter +/- .010"
 - Surface Printed in White Ink: "DGC P/N 17L27-9 18/2 CANBUS 120 OHM -60C TO 125C SUN RES J1939/15"

DESIGN:
 - SAE J1939-15
 - Operating Temperature Range: -40C to +125C
 - Impedance: 120 OHM +/- 10%
 - Maximum Capacitance (Cond.-Cond.): 22.75 pf/ft
 - Sunlight Resistant

COLOR CODE

CONDUCTOR	COLOR
1	YELLOW
2	GREEN

LISTINGS/AGENCY APPROVAL

- RoHS Compliant

REVISION HISTORY

0	12/20/17	WJD	FIRST ISSUE
1	4/25/18	WJD	ADD "SUN RES" TO LEGEND

Customer Number	
D.G. Part Number	17L27-9
Prepared By: LLJ	
Reviewed By: WJD	