

APPLICATION


Rauckman Utility Products Outrigger Pads provide a very strong, durable, and cost effective footing for your rigging applications. These sturdy pads are manufactured from tough solid Ultra High Molecular Weight (UHMW) Polyethylene material that has been tested under real-life conditions in extreme working environments.

FEATURES

- Lightweight
- Non-Conductive
- Stronger than Typical Wood, Plywood or Cast Metal Pads
- Will not Absorb Moisture
- Easy to Clean
- Chemical and Oil Resistant
- Compact Storage
- Long Life

SPECIFICATIONS

- Material: Solid UHMW Polyethylene
- Color: Black
- Lifting Handle: 1/2" Diameter, Double Braided Rope (installed on the width side)
- Material Memory: Unloaded Returns to Original Shape
- Operating Temperature: - 40°F to 180°F

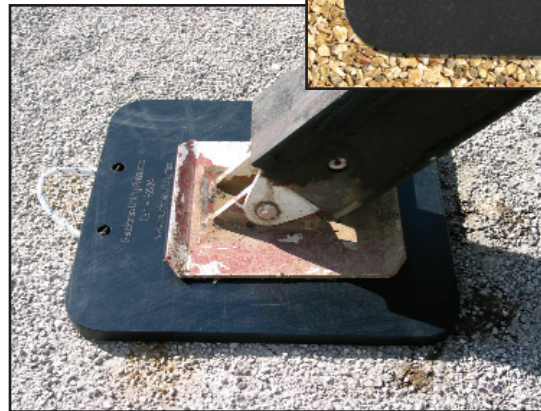

Cat. No. R-2224
Pictured

CATALOG NO.	VERTICAL LOAD	WIDTH	LENGTH	THICKNESS	WEIGHT	AREA
R-1212.75	35,000 lb.	12"	12"	0.75"	4 lb.	144 in ²
R-1818	55,000 lb.	18"	18"	1"	11 lb.	324 in ²
R-1824	55,000 lb.	18"	24"	1"	13 lb.	432 in ²
R-2224	60,000 lb.	22"	24"	1"	19 lb.	528 in ²
R-2418	55,000 lb.	24"	18"	1"	13 lb.	432 in ²
R-2424	60,000 lb.	24"	24"	1"	20 lb.	576 in ²
R-24242	62,000 lb.	24"	24"	2"	38 lb.	576 in ²
R-30302	85,000 lb.	30"	30"	2"	62 lb.	*900 in ²
R-36362	98,000 lb.	36"	36"	2"	90 lb.	*1296 in ²
R-48482	140,000 lb.	48"	48"	2"	160 lb.	*2034 in ²

* Equipped with two handles on opposite sides

Rauckman Utility Products, LLC.

37 Ednick Drive
Swansea, IL 62226
phone: 618.222.7100
fax: 618.222.7177
www.rauckmanutility.com